

FICHA TÉCNICA

Tira de LED flexible de 5m CRI80 12W/m
60W 24V

28112()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, Chip 60Leds/m EDISON
CRI y protección	CRI80, IP20 Y IP65
Voltaje:	24V
Potencia:	12W/m - 60W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

-  **28112(2022)71:** Tira Led 2200k, 5750Lm
-  **28112(2032)71:** Tira Led 2600-2800k, 6150Lm
-  **28112(2040)71:** Tira Led 4000-4200k, 6450Lm
-  **28112(2060)71:** Tira Led 6000-6500k, 6750Lm


IP65

-  **28112(6522)71:** Tira Led 2200k, 5750Lm
-  **28112(6532)71:** Tira Led 2600-2800k, 6150Lm
-  **28112(6540)71:** Tira Led 4000-4200k, 6450Lm
-  **28112(6560)71:** Tira Led 6000-6500k, 6750Lm


DIMENSIONES

Rollo: 5 metros

IP20

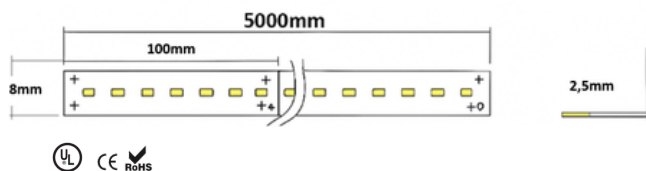


IP65

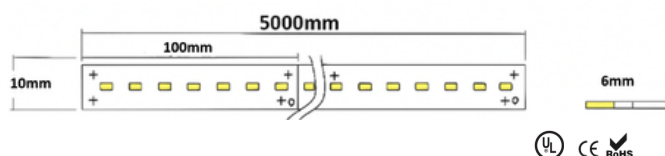

APLICACIONES

Aplicación	Beneficio
Mercados, oficinas y armarios	Decoración de esquinas y contornos
Festivales, eventos y espectáculos	Iluminación decorativa
Edificios y construcciones	Para iluminación decorativa exterior e interior



boralba@boralba.es
<https://led-iluminacion.es>