

FICHA TÉCNICA

Tira de LED flexible de 5m CRI80 20W/m
100W 24V

28120()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, Chip 120Leds/m EDISON
CRI y protección	CRI80, IP20 Y IP65
Voltaje:	24V
Potencia:	20W/m - 100W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20



- 28120(2022)71:** Tira Led 2200k, 9500Lm
- 28120(2032)71:** Tira Led 2600-2800k, 9900Lm
- 28120(2040)71:** Tira Led 4000-4200k, 10200Lm
- 28120(2060)71:** Tira Led 6000-6500k, 10500Lm

IP65

- 28120(6522)71:** Tira Led 2200k, 9500Lm
- 28120(6532)71:** Tira Led 2600-2800k, 9900Lm
- 28120(6540)71:** Tira Led 4000-4200k, 10200Lm
- 28120(6560)71:** Tira Led 6000-6500k, 10500Lm

DIMENSIONES

Rollo: 5 metros

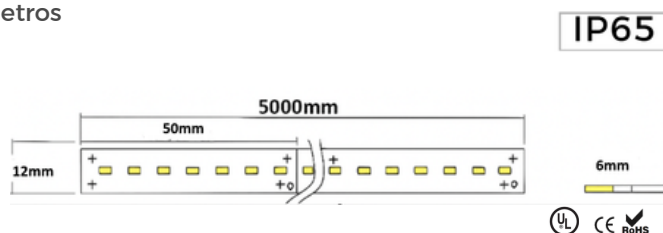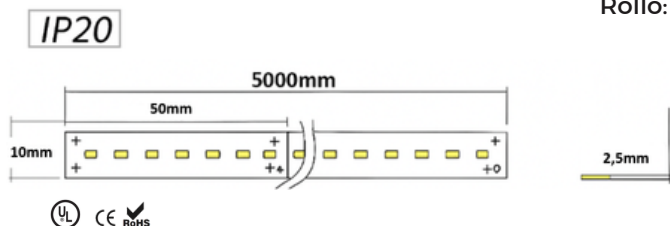

APLICACIONES

Aplicación	Beneficio
Mercados, oficinas y armarios	Decoración de esquinas y contornos
Festivales, eventos y espectáculos	Iluminación decorativa
Edificios y construcciones	Para iluminación decorativa exterior e interior

