

FICHA TÉCNICA

Tira de LED flexible de 5m CRI90 7.2W/m
36W 24V

2917()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, chip 60Leds/m EDISON
CRI y protección	CRI90, IP20 Y IP65
Voltaje:	24V
Potencia:	7,2W/m - 36W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

-  **2917(2022)71:** Tira Led 2200k, 4020Lm
-  **2917(2032)71:** Tira Led 2600-2800k, 4080Lm
-  **2917(2040)71:** Tira Led 4000-4200k, 4140Lm
-  **2917(2060)71:** Tira Led 6000-6500k, 4200Lm


IP65

-  **2917(6522)71:** Tira Led 2200k, 4020Lm
-  **2917(6532)71:** Tira Led 2600-2800k, 4080Lm
-  **2917(6540)71:** Tira Led 4000-4200k, 4140Lm
-  **2917(6560)71:** Tira Led 6000-6500k, 4200Lm


DIMENSIONES

Rollo: 5 metros

IP20

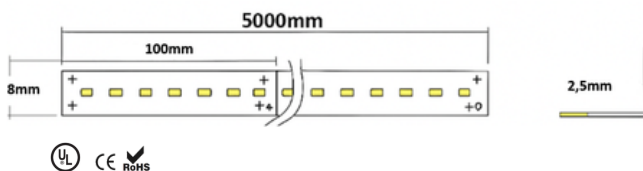

IP65

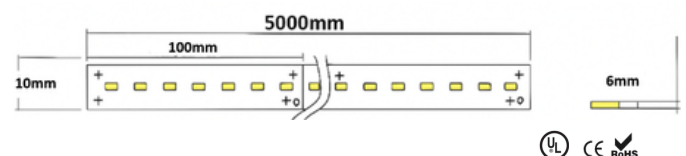

APLICACIONES

Aplicación	Beneficio
Iluminación directa e indirecta	Soluciones versátiles que equilibran funcionalidad y estética.
Señalización	Iluminación precisa y uniforme para máxima visibilidad e impacto visual.
Publicidad	Resalta marcas y mensajes

