

FICHA TÉCNICA

Tira de LED flexible COB de 5m
CRI90 5W/m 25W 24V

2905()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, chip 320Leds/m EDISON
CRI y protección	CRI90, IP20 Y IP65
Voltaje:	24V
Potencia:	5W/m- 25W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

-  **2905(2022)71:** Tira Led 2200k, 1600Lm
-  **2905(2032)71:** Tira Led 2600-3200k, 1900Lm
-  **2905(2040)71:** Tira Led 4000-4200k, 2200Lm
-  **2905(2060)71:** Tira Led 6000-6500k, 2500Lm


IP65

-  **2905(6522)71:** Tira Led 2200k, 1600Lm
-  **2905(6532)71:** Tira Led 2600-3200k, 1900Lm
-  **2905(6540)71:** Tira Led 4000-4200k, 2200Lm
-  **2905(6560)71:** Tira Led 6000-6500k, 2500Lm


DIMENSIONES

Rollo: 5 metros

IP20

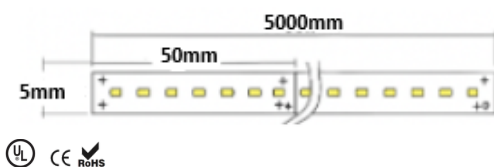

IP65

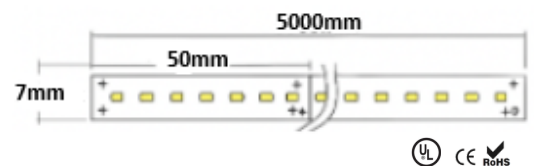

APLICACIONES

Aplicación	Descripción
Iluminación directa e indirecta	Equilibrio entre funcionalidad y estética
Señalización	Iluminación precisa y uniforme para alta visibilidad
Publicidad	Resalta marcas y mensajes con máxima eficiencia visual

