

FICHA TÉCNICA

Tira de LED flexible COB de 5m
CRI90 11W/m 54W 24V

29011()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 420 chip/m, chip EPISTAR
CRI y protección	CRI90, IP20 Y IP65
Voltaje:	24V
Potencia:	11W/m- 54W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

-  **29011(2022)71:** Tira Led 2200k, 4100Lm
-  **29011(2032)71:** Tira Led 2600-3200k, 4400Lm
-  **29011(2040)71:** Tira Led 4000-4200k, 4700Lm
-  **29011(2060)71:** Tira Led 6000-6500k, 5000Lm


IP65

-  **29011(6522)71:** Tira Led 2200k, 4100Lm
-  **29011(6532)71:** Tira Led 2600-3200k, 4400Lm
-  **29011(6540)71:** Tira Led 4000-4200k, 4700Lm
-  **29011(6560)71:** Tira Led 6000-6500k, 5000Lm


DIMENSIONES

Rollo: 5 metros

IP20

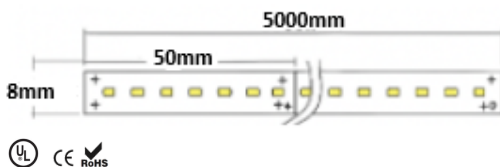

IP67

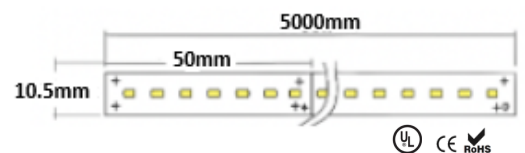

APLICACIONES

Aplicación	Descripción
Iluminación directa e indirecta	Equilibrio entre funcionalidad y estética
Señalización	Iluminación precisa y uniforme para alta visibilidad
Publicidad	Resalta marcas y mensajes con máxima eficiencia visual

