

FICHA TÉCNICA

Tira de LED flexible de 5m CRI90 10W/m
50W 24V

29110()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, chip 98Leds/m EDISON
CRI y protección	CRI90, IP20 Y IP65
Voltaje:	24V
Potencia:	10W/m- 50W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

-  **29110(2022)71:** Tira Led 2200k, 6670Lm
-  **29110(2032)71:** Tira Led 2600-2800k, 6730Lm
-  **29110(2040)71:** Tira Led 4000-4200k, 6790Lm
-  **29110(2060)71:** Tira Led 6000-6500k, 6850Lm

IP65



-  **29110(6522)71:** Tira Led 2200k, 6670Lm
-  **29110(6532)71:** Tira Led 2600-2800k, 6730Lm
-  **29110(6540)71:** Tira Led 4000-4200k, 6790Lm
-  **29110(6560)71:** Tira Led 6000-6500k, 6850Lm

DIMENSIONES

Rollo: 5 metros

IP65

IP20

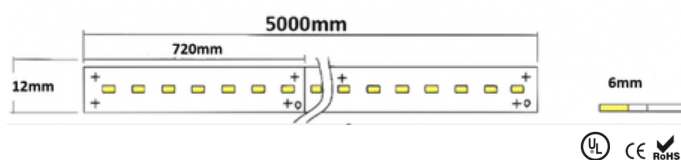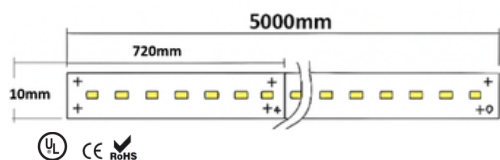

APLICACIONES

Aplicación	Beneficio
Iluminación directa e indirecta	Soluciones versátiles que equilibran funcionalidad y estética.
Señalización	Iluminación precisa y uniforme para máxima visibilidad e impacto visual.
Publicidad	Resalta marcas y mensajes

