

FICHA TÉCNICA

Tira de LED flexible de 5m CRI90 17.2W/m
86W 24V

29117()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, chip 168Leds/m EDISON
CRI y protección	CRI90, IP20 Y IP65
Voltaje:	24V
Potencia:	17.2W/m- 86W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

-  **29117(2022)71:** Tira Led 2200k, 11570Lm
-  **29117(2032)71:** Tira Led 2600-2800k, 11630Lm
-  **29117(2040)71:** Tira Led 4000-4200k, 11690Lm
-  **29117(2060)71:** Tira Led 6000-6500k, 11750Lm


IP65

-  **29117(6522)71:** Tira Led 2200k, 11570Lm
-  **29117(6532)71:** Tira Led 2600-2800k, 11630Lm
-  **29117(6540)71:** Tira Led 4000-4200k, 11690Lm
-  **29117(6560)71:** Tira Led 6000-6500k, 11750Lm


DIMENSIONES

Rollo: 5 metros

IP20

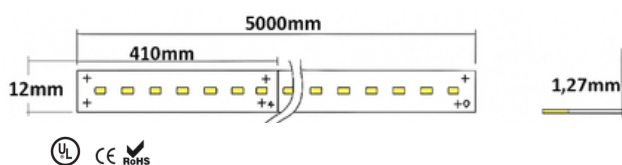

IP65

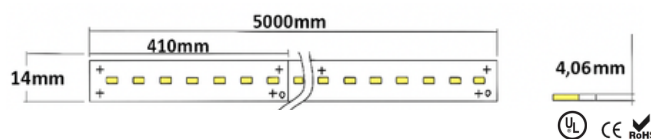

APLICACIONES

Aplicación	Descripción
Iluminación directa e indirecta	Equilibrio entre funcionalidad y estética
Señalización	Iluminación precisa y uniforme para alta visibilidad
Publicidad	Resalta marcas y mensajes con máxima eficiencia visual

