


# FICHA TÉCNICA

Tira de LED flexible de 5m CRI90  
20W/m 100W 24V

## 29120( )71

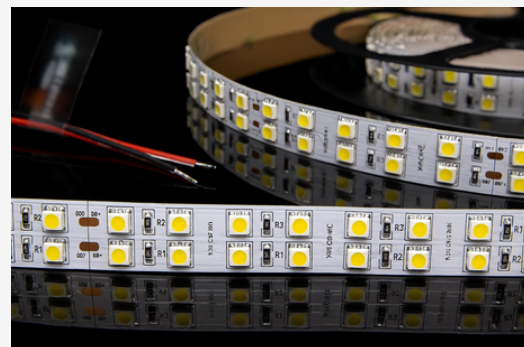

### CARACTERÍSTICAS

|                  |                                            |
|------------------|--------------------------------------------|
| Tipo             | PVC, flexible, 2835, chip 196Leds/m EDISON |
| CRI y protección | CRI90, IP20 Y IP65                         |
| Voltaje:         | 24V                                        |
| Potencia:        | 20W/m- 100W/5m                             |
| Temperatura      | Ta: -20° a 40° // Tc: 60°                  |
| Ángulos          | 120°                                       |
| Vida útil        | 30000 Horas                                |
| Garantía         | 3 Años                                     |

### ESPECIFICACIONES TÉCNICAS

#### IP20

-  **29120(2032)71:** Tira Led 2600-3200k, 13380Lm
-  **29120(2040)71:** Tira Led 4000-4200k, 13440Lm
-  **29120(2060)71:** Tira Led 6000-6500k, 13500Lm



#### IP65

-  **29120(6532)71:** Tira Led 2600-3200k, 13380Lm
-  **29120(6540)71:** Tira Led 4000-4200k, 13440Lm
-  **29120(6560)71:** Tira Led 6000-6500k, 13500Lm


### DIMENSIONES

Rollo: 5 metros

IP20

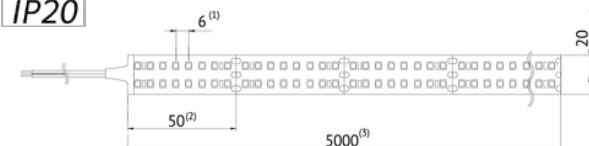

IP65

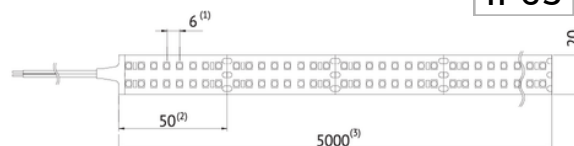

### APLICACIONES

| Aplicación                      | Beneficio                                                                |
|---------------------------------|--------------------------------------------------------------------------|
| Iluminación directa e indirecta | Soluciones versátiles que equilibran funcionalidad y estética.           |
| Señalización                    | Iluminación precisa y uniforme para máxima visibilidad e impacto visual. |
| Publicidad                      | Resalta marcas y mensajes                                                |

