

FICHA TÉCNICA

Tira de LED flexible de 5m CRI80 14.4W/m
72W 24V

28114()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, Chip 120Leds/m EDISON
CRI y protección	CRI80, IP20 Y IP65
Voltaje:	24V
Potencia	14.4W/m - 72W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

-  **28114(2022)71:** Tira Led 2200k, 7000Lm
-  **28114(2032)71:** Tira Led 2600-2800k, 7400Lm
-  **28114(2040)71:** Tira Led 4000-4200k, 7700Lm
-  **28114(2060)71:** Tira Led 6000-6500k, 8000Lm


IP65

-  **28114(6522)71:** Tira Led 2200k, 7000Lm
-  **28114(6532)71:** Tira Led 2600-2800k, 7400Lm
-  **28114(6540)71:** Tira Led 4000-4200k, 7700Lm
-  **28114(6560)71:** Tira Led 6000-6500k, 8000Lm


DIMENSIONES

Rollo: 5 metros

IP20

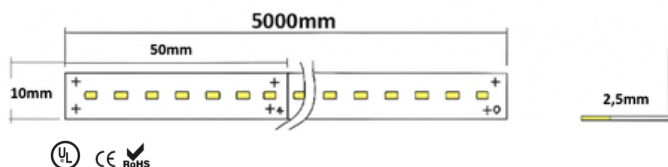

IP65

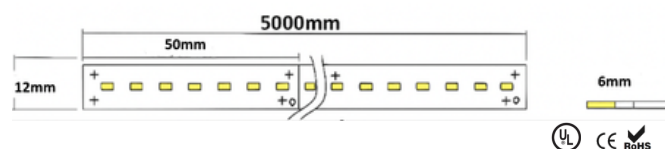

APLICACIONES

Aplicación	Beneficio
Mercados, oficinas y armarios	Decoración de esquinas y contornos
Festivales, eventos y espectáculos	Iluminación decorativa
Edificios y construcciones	Para iluminación decorativa exterior e interior

